


# GX6 EC Range - Window / Surface Wall Fans

## Key Features

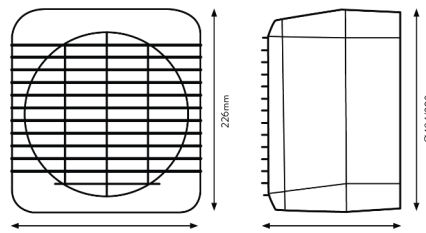

**Application:** Pubs, restaurants, offices, kitchens, factories, schools & shops.  
**Humidity:** XRH controller  
**Movement:** XPIRA  
**Time delay:** DT20  
**Colour:** White

**Product Size:**  
 1.4kg (Weight) x 226mm (H) x 210mm (Width) x 148mm (D)

**Packaging**  
**GX6EC & GXC6EC**  
**Packed Weight:** 1.6kg  
**Packed Height:** 240mm  
**Packed Width:** 234mm  
**Packed Depth:** 170mm

## XPELAIR GX6 EC

The Xpelair GX6 EC models are designed for use in kitchens and utility rooms and can be window or panel mounted.

Installation in a 25mm window or panel using standard metal ladder strips.

If installed in panels or walls thicker than 25mm, then use GXL20/50 extended ladder strips to enable connection of outer grille to inside of fan.

Pre-balanced impellers eliminate “fan judder” and ensure quiet, trouble-free operation. Sealed for life, maintenance free bearings ensure suitability for running at any angle. Running costs are impressively low, and when not in use the silent electro-thermal shutter closes silently against backdraughts.

Class B insulation for operation in ambient temperatures up to 40°C and are fitted with a thermal cut out.

Motors are of lower wattage than AC motors and use less electricity.

## Specifications

	GX6 EC	GXC6 EC
UK reference number:	071262	071279
No. of Speeds	1	1
Power (W)	9.5	6.8
Power Rating	120 - 230V, 50 - 60Hz	
Flow rate (l/s)	64	
Flow rate (m³/h)	229	
Noise dB(A)@3m	34	
IPX Rating Motor Type	IPX4	
Pullcord Operated Shutter		X
Silent Electro-Thermal Shutter	X	